


# TGModule A-PM

TGModule A-PM incorporates Ampliconyx patent protected, polarization maintaining ytterbium doped tapered double clad fiber (T-DCF) (US 8,433,168 B2, Japan 5390524, Peoples Republic of China ZL 200880119087.7, EPO 08805462.2 pending) spliced to a pump combiner allowing easy integration of pump diodes. The wide end of T-DCF is terminated by angle cleave. The module is fully tested and shipped with complete test report.

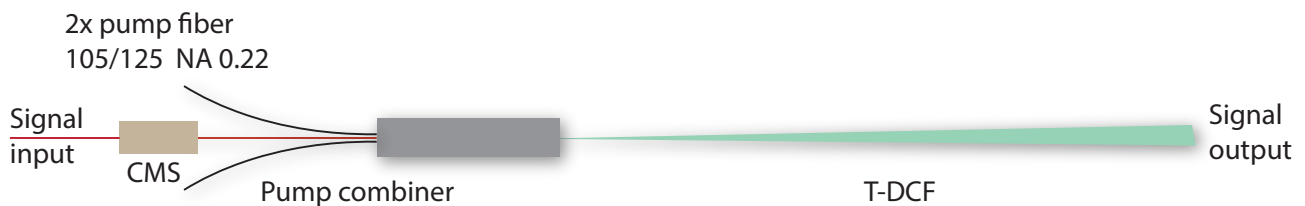

## Specifications

Wavelength	nm	1030-1050
Pump wavelength	nm	976 +/- 2
Mode field diameter	µm	up to 50
Polarization extinction ratio (PER)	dB	> 15
M <sup>2</sup>		< 1.2
Ellipticity		> 0.92
Core NA		0.11
Cladding NA		0.4
Input signal fiber		PM 6/125 DCF or PM 10/125 DCF
Pump fiber, narrow end		2 fibers 105/125 NA 0.22, 25 W each
Output power		up to 150
Input power	mW	> 0.5
Back reflected power	W	< 1
Recommended min. water flow	l/min	5 @ 20 °C
Pump power	W	< 25
Pump power (wide end, free space)	W	up to 200
Min. coiling diameter	cm	37.5

Ordering: TGMA - PM - wavelength - input fiber  
Example: TGMA - PM - 1035 - 6/125 DCF



Ampliconyx Oy  
Lautakatonkatu 18  
33580 Tampere, Finland  
+358 40 705 4772

[www.ampliconyx.com](http://www.ampliconyx.com)  
[sales@ampliconyx.com](mailto:sales@ampliconyx.com)